


# XL MECHANICAL FULL-WIDTH GOOSENECK



XL 70 Mechanical Full-width Gooseneck

## YOUR SOLUTIONS-BASED HAULING PARTNER



double donuts

### UNMATCHED VERSATILITY

Manual ride height control and double donuts allow the main deck height to vary 1½" in the wheel area and 1½" at the neck to suit the drivers' needs over varying terrains. The trailer is designed for hauling taller equipment, with 6" ground clearance and 18" loaded deck height.



standard main deck

### FULLY EQUIPPED MAIN DECK

The XL 70 MFG deck is fully equipped for versatile hauling, with (14) ½" chain drops per side, 8 bent D-rings per side, and removable swingout outrigger brackets on 24" centers. The rugged Apitong decking stands up to years of wear and tear.



### USER-FRIENDLY DESIGN

XL products are designed to fit your needs. The rear coupler uses an angled control panel, making it easier to reach all the needed controls: air, electric, and raise & lower valve.


### BUILT WITH YOU IN MIND

- Pierced beams
- 4 beam main deck
- Mechanical neck makes the trailer lighter versus a hydraulic neck.
- Pan style D-rings on the upper deck & rear deck offer versatility.
- Front ramp tapers to 4" for easy loading.
- Toolbox with light makes finding items in the dark easier.
- 1½" flush Apitong decking is stronger than Oak.
- Traction aids on the rear bridge transition assist when loading onto the rear bridge.
- Trailer is reinforced for Flip Axle.
- XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

**FIND YOUR SPECIALIZED SOLUTION TODAY**

visit [xlspecializedtrailer.com](http://xlspecializedtrailer.com)

# XL 70 MFG: STANDARD SPEC

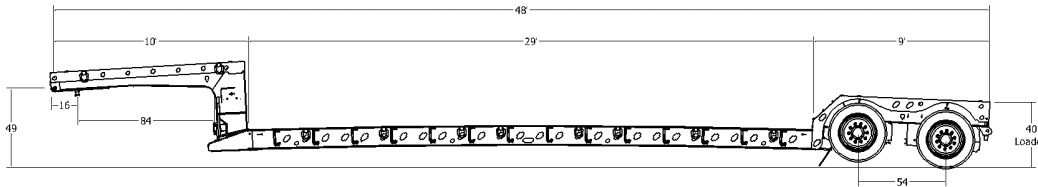

## XL 70 MFG

**CAPACITY: 70,000 LB OVERALL**  
**CONCENTRATED: 70,000 LB IN 16'**  
**OAL: 48' | OAW: 102"**

### GOOSENECK

MECHANICAL DETACHABLE FULL-WIDTH  
10' LONG  
49" 5TH WHEEL HEIGHT  
84" SWING CLEARANCE  
16" KING PIN SETTING W/ 3/8" PLATE  
(2) BENT D-RINGS PER SIDE  
(2) PAN STYLE D-RING PER SIDE,  
ONE ON EACH CORNER  
1 1/8" APITONG DECKING FLUSH  
ALUMINUM MUDFLAPS  
DOUBLE DONUT FRONT  
CONNECTOR PLATE  
TOOLBOX IN BASE W/ LOCKABLE  
ALUMINUM LID, CHAIN RACK, LIGHT

### GOOSENECK OPTIONS

PULL OUT LIGHTS  
1 PAIR CLEARANCE LIGHTS  
1 3/8" APITONG DECKING - RAISED  
REGISTRATION HOLDER

### MAIN DECK

29' LONG  
T-1 FLANGE, 80K WEB  
(4) 12" FAB I-BEAMS  
18" LOADED DECK HEIGHT  
6" GROUND CLEARANCE  
6" & 4" JR I-BEAM CROSS MEMBERS  
ON 12" ALT. CENTERS  
(8) BENT D-RINGS PER SIDE  
1 1/8" APITONG DECKING FLUSH,  
CENTER COVERED  
RAMP TAPERS TO 4"  
(14) 1/2" CHAIN DROPS PER SIDE  
REMOVABLE SWING OUT OUTRIGGER  
BRACKETS ON 24" CENTERS

### MAIN DECK OPTIONS

CENTER DECK OPEN  
STORAGE COMPARTMENTS IN FRONT  
OF MAIN DECK  
REMOVABLE SWING OUT OUTRIGGERS  
OAK OUTRIGGER PLANKS, 2" X 10"  
1 3/8" APITONG DECKING - RAISED  
CLEARANCE LIGHTS  
4-WAY PLUG(S)

### REAR BRIDGE

9' LONG  
40" DECK HEIGHT  
1 1/8" APITONG DECKING FLUSH  
(2) FLAG HOLDERS  
(2) STAKE POCKETS IN TAIL CHANNEL  
(2) PAN STYLE D-RING PER SIDE, ON  
CORNER  
FRAME REINFORCEMENT FOR FLIP AXLE  
66" WIDE BUMPER AT REAR

### REAR BRIDGE OPTIONS

1 PAIR CLEARANCE LIGHTS  
PULL OUT LIGHTS  
4" AMBER STROBE TAIL LIGHT  
ADDITIONAL TAIL LIGHT  
BATTERY BACK UP  
(1) 4-WAY PLUG  
1 3/8" APITONG DECKING - RAISED  
DOCK BUMPERS

### SUSPENSION

HEND-TURNER / 25,000 LB AIR RIDE  
RAISE AND LOWER VALVE  
MANUAL RIDE HEIGHT CONTROL

### SUSPENSION OPTIONS

LIQUID FILLED AIR GAUGE  
AIR WEIGH DIGITAL SCALE  
CONTROL IN ALUMINUM BOX - BALL VALVES  
ELECTRIC DUMP VALVE WITH 4-WAY PLUG  
AND WIRE

### AXLES

(2) 25,000 LB NOMINAL  
54" SPACING  
HUB PILOT, OUTBOARD DRUMS  
4S2M ABS  
16 1/2" X 7" BRAKES  
(2) PAIR SPRING BRAKES

### AXLE OPTIONS

HUBOMETER  
TP AXLES (SAME INNER & OUTER BEARINGS)

### WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS  
255 / 70R / 22.5 TIRES

### WHEEL AND TIRE OPTIONS

ALUMINUM MILL WHEELS (INSIDE)  
ALUMINUM MILL WHEELS (OUTSIDE)  
ALUMINUM POLISHED WHEELS (OUTSIDE)  
ALUMINUM DURABRIGHT WHEELS  
(OUTSIDE)  
MICHELIN 255/70R/22.5 TIRES  
GOODYEAR 275/70R/22.5 TIRE  
(41" REAR BRIDGE)  
CUSTOMER SPECIFIED MUD FLAPS

### LIGHTING

12V SEALED GROTE HARNESS  
RUBBER MOUNTED LED LIGHTS  
2 TAIL LIGHT PACKAGE WITH  
ALUMINUM COVER

### PAINT

FULL 1 YEAR WARRANTY  
BLACK, IH RED, OR NEW CAT YELLOW  
AIR & ELECTRIC DONE AFTER PAINT

### PAINT OPTIONS

NON-STANDARD PAINT COLORS  
NON-STANDARD METALLIC PAINT

### AVAILABLE MODELS

XL 70 MFG

### OTHER CUSTOM CAPACITIES AND

**OPTIONS ALSO AVAILABLE,  
ASK YOUR SALES REP FOR DETAILS**

*STANDARD FEATURES VARY WITH CUSTOM MFGS*